



LORUS CAL. VD75, VD76, VD86, VX7J, VX7N, VX7P, VX7R, VX9P, VX9R

LORUS


■ CHARACTERISTICS Hour Minute Second Date Day 24h


VD75	•	•	(\$mall)	•	•			
VD76	•	•	(Small)	•	•			
VD86	•	•	(Small)	•	•			
VX7J	•	•	•	•	•	•		
VX7N	•	•	•	•	•	•		
VX7P	•	•	•	•	•			
VX7R	•	•	•	•		•		
VX9J	•	•	•	•	•	•		
VX9N	•	•	•	•	•	•		
VX9P	•	•	•	•	•			
VX9R	•	•	•	•		•		
DISPLAY AND CROWN / BUTTONS								

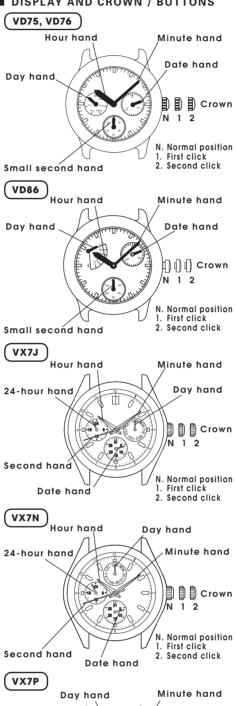




 \bigoplus





Crown

N




LORUS NREMHCC.indd



VD75, VD76, VD86, VX7 series

HOW TO SET THE TIME AND DAY (Day hand is not available for VX7R.)

Day hand



- Pull out the crown to the second click when the second hand is pointing at the 12 o'clock position. 2
- Turn the crown clockwise to advance the hour and minute hands until the day hand is set to the desired day of the week.

 Turn the crown to set the time.
- Push the crown back into the normal position in accordance with a time signal.
- **NOTES**

1

- To advance the day hand quickly, turn back the hour and minute hands 4 to 5 hours beyond the point the day changes (between 11:00 p.m. and 4:00 a.m.), and then advance them again until the day hand is set to the next day.
 *The day hand will not move back by turning the crown counterclockwise. When adjusting the day hand, turn the crown
 - slowly.
- When setting the minute hand, advance it 4 to 5 minutes ahead of the desired time and then turn it back to the exact time.
- The 24-hour hand moves correspondingly with the hour hand (VX7J, VX7N, VX7R). When setting the hour hand, check that the 24-hour hand is correctly set (VX7J, VX7N, VX7R).
- HOW TO SET THE DATE

Ď



- **NOTES**

2

- Do not set the date hand between 10:00 p.m. and 1:00 a.m. (VD75, VD76, VD86), or, 9:00 p.m. and 4:00 a.m. (VX7 series). Otherwise, the date may not change properly. If it is necessary to set the date during this time period, first change the time to any time outside it, and set the date and then reset the While setting the date hand, check that it moves properly in one-day increments. It is necessary to adjust the date on the first day after a 30-day month and February.
- VX9 series I HOW TO SET THE TIME


3



8

- **NOTES** The 24-hour hand moves correspondingly with the hour hand (except VX9P).
 When setting the hour hand, check that the 24-hour hand is correctly set (except VX9P).
 When setting the minute hand, advance it 4

- to 5 minutes ahead of the desired time and then turn it back to the exact time. HOW TO SET DATE AND DAY OF HOWTHE WEEK
- Ť



- It is necessary to adjust the date on the first day after a 30-day month and February. **■ LUMIBRITE WATCH** If your watch is a LORUS LUMIBRITE watch, it has following features.
- and store LORUS LUMIBRITE watches absorb
- light energy from natural and artificial light sources and emit light in the dark. They are made of environmentally friendly material, and therefore, are harmless to human beings and therefore, are ho the environment.

With a full charge, LORUS LUMIBRITE watches glow in the dark hours longer than conventional luminous watches of this type. If exposed to a light of more than 500 lux (i.e., the brightness of a typical office) for approximately 10 minutes, or direct sunlight for 2 minutes, they will glow for hours.

Since LORUS LUMIBRITE watches emit the

- since LORUS LUMIBRITE watches emit the light they store, the brightness will decrease gradually over time. The length of time they will glow may also differ slightly depending on such factors as the brightness of and distance from the light source used to charge the watch. **BATTERY CHANGE**
- The miniature battery SEIKO SR626SW (VD75, VD76, VD86) or SR927SW (VX series), which powers your watch should last approximately 3 years. However, because it is inserted at the factory, the actual life of the battery once in your possession may be less than 3 years. Be sure to replace the battery to prevent any possible malfunction as soon as it runs down. To replace the battery we recommend taking the watch to a local watch repair shop.

■ CARE OF YOUR LORUS WATCH

CAUTION

not expose the old battery to fire recharge it. Keep it at a place yond the reach of children. If a ild swallows it, consult a doctor Do immediately

NΩ

NO

Skin diving

NO

NO

NO

NO

Condition of Accidental contact with water, such as splashes and rain use Indication

NO

YES

WATER RESISTANT

NO INDICATION

WATER RESISTANT

BATTERY

	/ATER RESISTANT (50M/50 BAR)	YES	YES	NO	NO				
	/ATER RESISTANT 100M/10 BAR OR ABOVE)	YES	YES	YES	NO				
*	 If your watch is 200 M/20 BAR, 100 M/10 BAR or 50 M/5 BAR water resistant, it is so indicated on the dial/case back. Do not operate the buttons when the watch is wet. If the watch is exposed to salt water, rinse it in fresh water and then wipe it thoroughly dry. 								

Caution: Leather straps are not water resistant except so indicated, even if the watch head is water

resistant. ALLERGIC REACTION Because the case and band touch the skin directly, it is important to clean them regularly. If not, shirt sleeves may be stained and those with delicate skin may develop a rash. Please wear the watch with some play to avoid any possible allergic reaction. If you develop a rash on your wrist, stop wearing and consult a physician

physician. MAGNETISM Your watch will be adversely affected by strong magnetism. Keep it away from close contact

with magnetic objects. SHOCKS AND VIBRATIONS

Your watch may be worn for normal sports activities, but be careful not to drop it or hit it on hard surfaces. **TEMPERATURE** Your watch is preadjusted so that constant accuracy may be insured at normal

LORUS NREMHCC.indd 2

temperature. **■ SERVICE**

Printed in China

2016/04/07

11:3



 \bigcirc

NOTES



When your LORUS watch requires repair o servicing, please see the enclosed WARRANTY GUARANTEE.